

ULTRA-SEP G Series

ULTRA-SEP G Series Bilge Water Separators meet your need for a small unit with a lower capital cost. Ideal for engine rooms where your installation space and budget are tight. G Series provide the same Positive Physical Barrier and continuous less than 5ppm discharge as Compass Water Solutions larger ULTRA-SEP systems but in a more compact size.



Benefits:

- Superior separation of emulsions with SPIR-O-LATOR® Membrane Technology. The Positive Physical Barrier to oil reduces risk of accidental overboard discharge.
- Continuous discharge with less than 5ppm oil content.
- Small footprint allows easy retrofit installation.
- Manual controls are simple and easy to operate.
- All units are pre-wired and pre-piped to facilitate easy installation and operation.
- IMO MEPC.107(49) / EC-MED type approved by USCG and ABS
- Updated design with improved pre-filter, simplified hydraulic flow, easy to read gauges, motorized ball valves, electric fail-close overboard discharge valve and updated controls.

Options


- 5PPM-Calibrated Monitor
- In-Line Heaters
- Duplex Filtration Pre-treatment Skids



ULTRA-SEP G Series

Model No.	Throughput	Length	Width	Height	Weight Dry	Oily Water Inlet	Processed Water Discharge	Oil Discharge	Power
	m ³ /h(gpm)	mm (in)	mm (in)	mm (in)	kg (lbs)	mm (in)	mm (in)	mm (in)	kW
US-500-C *	0.5 (2.2) **	890 (35)	760 (30)	1016 (40)	243 (536)	25 (1.0)	25 (1.0)	25 (1.0)	3
US-1000-G	1.0 (4.4) ***	1135 (45)	890 (35)	1600 (63)	322 (710)	25 (1.0)	25 (1.0)	25 (1.0)	4

[* dual-pump style; ** 1.7 GPM Overboard; ***3.5 GPM Overboard]

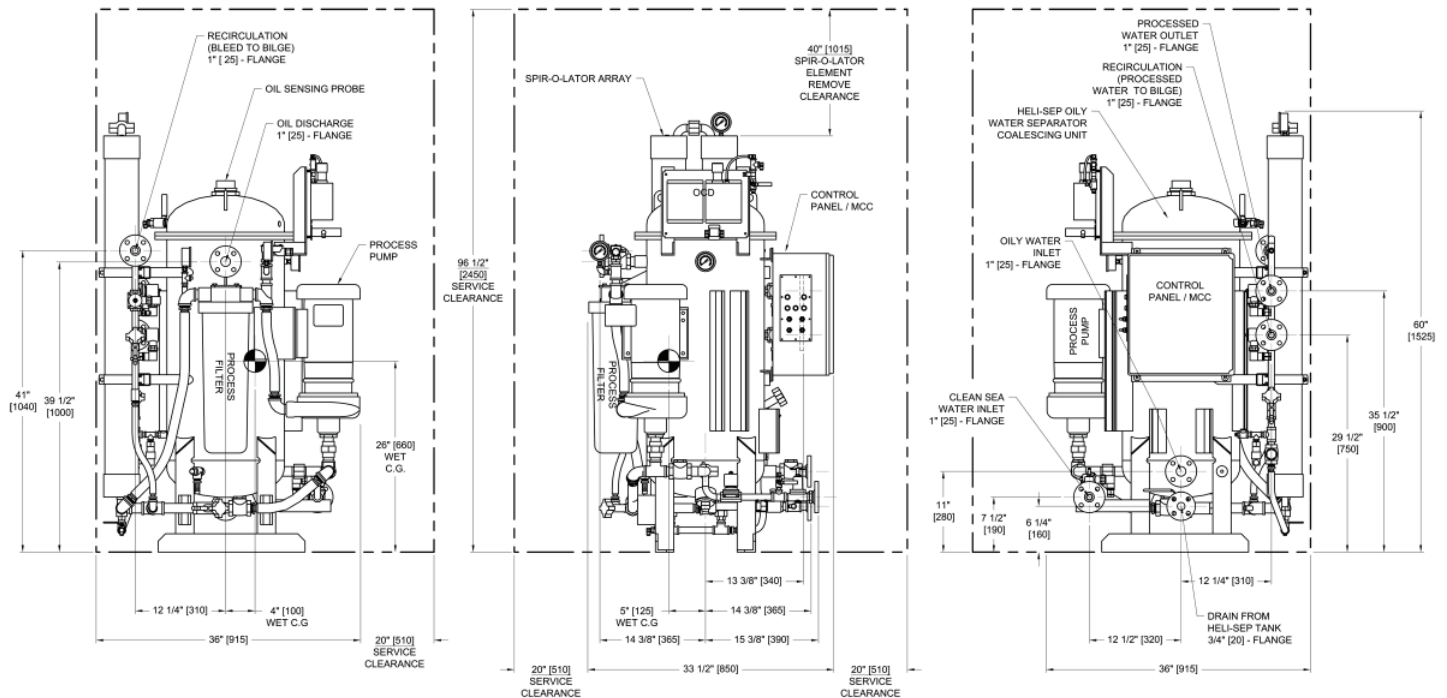

Compass Water Solutions

15542, Mosher Ave., Tustin, California 92780, USA

T: + 1-949-222-5777 F: + 1-949-222-5770

info@compasswater.com

www.compasswater.com